



**General Description:**

MM-LNA-005180-30-4 is a Low Noise Amplifier that operates over the frequency range of 0.5 to 18 GHz. This model provides a typical gain of 30 dB and a typical noise figure of 4.0 dB. It provides an OP1dB of 13 dB typical and operates on +12 VDC with a typical current draw of 140mA.

**Features:**

- Ultra Wide Band: 0.5-18.0 GHz
- Gain: 30 dB
- 50 Ohm input and output match
- Internally regulated
- Unconditionally stable

**Applications:**

- Radar Systems
- Communication Systems
- Receivers Systems

**Electrical Specifications (23° C):**

Parameter	Value			Units
	Min	Typ	Max	
Frequency Range	0.5		18	GHz
Gain	26	30		dB
Gain Flatness		± 1	± 2	dB
Noise Figure		4.0	5.5	dB
Output Power (P1dB)	13	15		dBm
Output IP3		26		dBm
Input VSWR		1.8	2.0	:1
Output VSWR		1.8	2.0	:1
DC Voltage		+12		V
DC Current		140	150	mA

**Absolute Maximum Ratings:**

Condition	Value
DC Voltage	+15V
Maximum Input Power(CW)	-10dBm
ESD sensitivity (HBm)	Class 0, passed 150V

**Mechanical Specifications:**

Parameter	Value
Length	30 mm
Width	30 mm
Height	10.2 mm
RF Connector	SMA Female



Focus on the future


Mountain Microwave

Low Noise Amplifier

MM-LNA-005180-30-4

0.5 to 18 GHz

Outline Drawing:

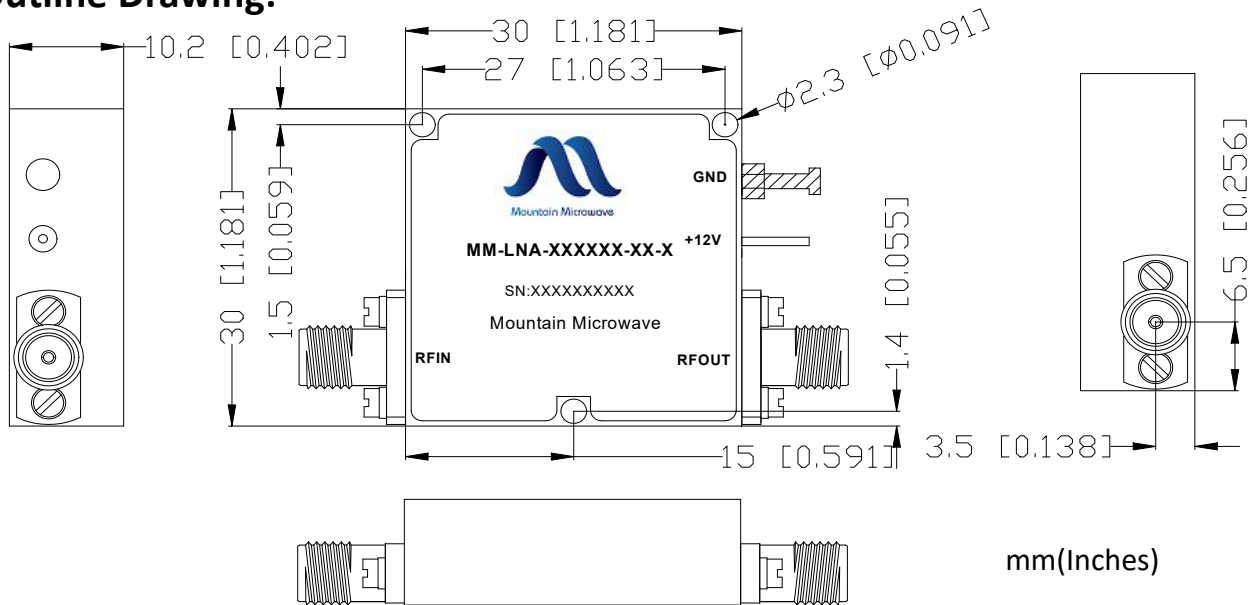

Environmental Conditions:

Parameter	Standard	Description
Operational Temperature		-45°C~+85°C
Storage Temperature		-55°C~+125°C
Random Vibration	MIL-STD-883K, Method 2026, Cond. IB	50 - 2000 Hz, 7.3 Grms
Humidity	MIL-STD-202, Method 103B, Cond. B	100% RH at 35c, 95%RH at 40°C
Altitude	MIL-STD-883K, Method 1001, Cond. C	50,000 feet

Caution:

- Exceeding absolute maximum ratings shown will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- Heat Sink required during operation.