



Focus on the future

Mountain Microwave

**Broadband Power Divider**

MM-BPD-005060-02

0.5-6.0 GHz, 2-Way

**General Description:**

MM-BPD-005060-02 is a 2-Way Power Divider operating over the 0.5 to 6.0 GHz frequency range. This model has a maximum insertion loss of 1.1 dB and has very good phase and amplitude match. The compact housing is outfitted with SMA female connectors.

**Features:**

- Ultra Wide Band: 0.5-6.0GHz
- Ultra Broadband, Multi-Octave
- Superior Phase & Amplitude Balance

**Applications:**

- Radar Systems
- Communication Systems
- Receivers Systems

**Electrical Specifications :**

Parameter	Value			Units
	Min	Typ	Max	
Frequency Range	0.5		6.0	GHz
Insertion Loss			1.1	dB
VSWR			1.3	:1
Isolation	18			dB
Amplitude Balance			0.3	dB
Phase Balance			5	
Power Handling			30	W
Impedance		50		$\Omega$

**Mechanical Specifications:**

Parameter	Value
Length	34 mm
Width	48 mm
Material / Finishing	Aluminum/Black Paint
RF Connector	SMA Female



Mountain Microwave


Focus on the future

Broadband Power Divider

MM-BPD-005060-02

0.5-6.0 GHz, 2-Way

Outline Drawing:

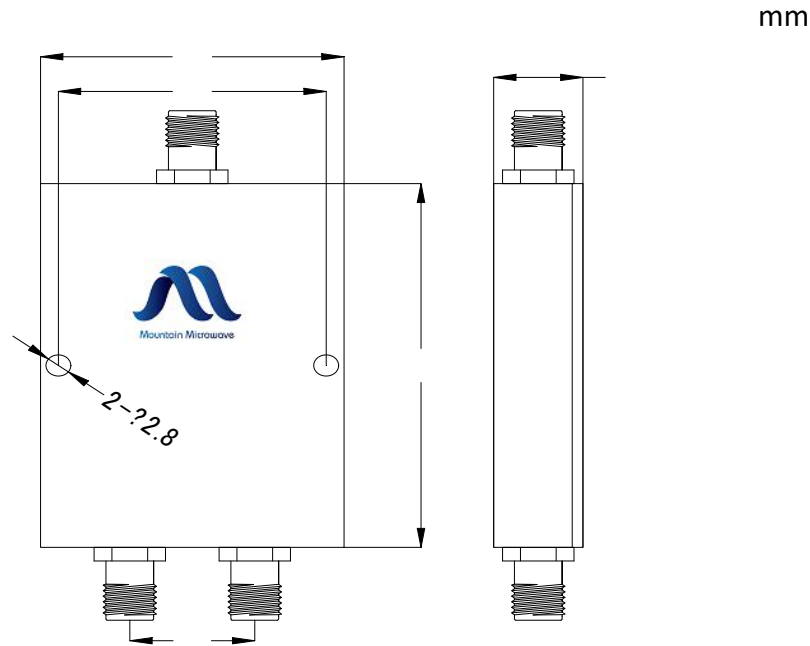

Environmental Conditions:

Parameter	Standard	Description
Operational Temperature		-45°C~+85°C
Storage Temperature		-55°C~+125°C
Random Vibration	MIL-STD-883K, Method 2026, Cond. IB	50 - 2000 Hz, 7.3 Grms
Humidity	MIL-STD-202, Method 103B, Cond. B	100% RH at 35c, 95%RH at 40°C
Altitude	MIL-STD-883K, Method 1001, Cond. C	50,000 feet

Please note, all information contained in this data sheet is subject to change without notice.

ver 1.0 0618