



General Description:

MM-BPA-007060-33-34 is a broadband Power amplifier with a typical small signal gain of 33 dB, a nominal Psat of +35 dBm across the frequency range of 0.7 to 6 GHz. The DC power requirement for the amplifier is +28 VDC/0.6 A.

Features:

- Ultra Wide Band: 0.7-6.0 GHz
- Output Psat: 35 dBm
- 50 Ohm input and output match
- Internally regulated
- Unconditionally stable

Applications:

- Radar Systems
- Communication Systems
- Receivers Systems

Electrical Specifications (23° C):

Parameter	Value			Units
	Min	Typ	Max	
Frequency Range	0.7		6	GHz
Gain	30	33		dB
Gain Flatness		±2.0	±2.5	dB
Output P1dB	33	34		dBm
Output Psat		35		dBm
Input VSWR		1.6	2.0	:1
Output VSWR		1.6	2.0	:1
Internally Generated Spurious		-60		dBc
Reverse Isolation		45		dB
DC Voltage		+28		V
DC Current		0.6	1	A

Absolute Maximum Ratings:

Condition	Value
DC Voltage	+30V
Maximum Input Power(CW)	+10 dBm
ESD sensitivity (HBm)	Class 0, passed 150V

Mechanical Specifications:

Parameter	Value
Length	80mm
Width	67 mm
Height	12 mm
RF Connector	SMA Female



Mountain Microwave

Focus on the future


Broadband Power Amplifier

MM-BPA-007060-33-34

0.7-6 GHz

Outline Drawing:

mm(Inches)

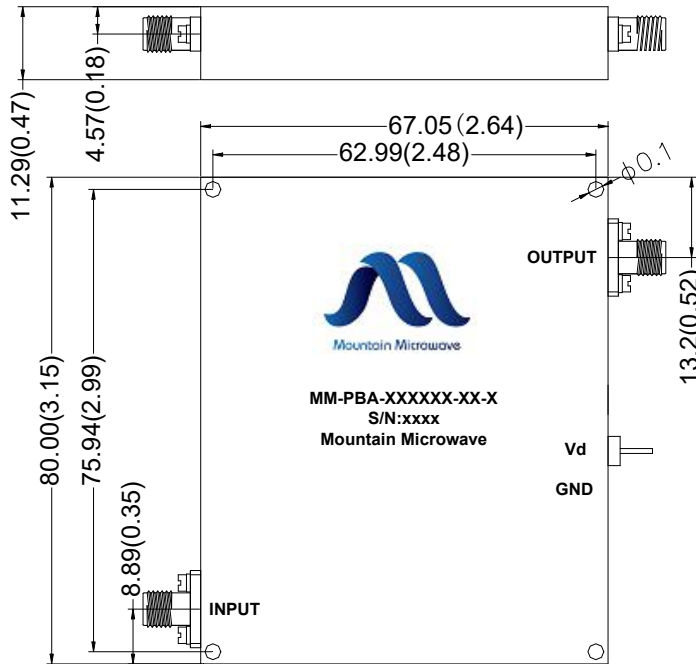

Environmental Conditions:

Parameter	Standard	Description
Operational Temperature		-45°C~+85°C
Storage Temperature		-55°C~+125°C
Random Vibration	MIL-STD-883K, Method 2026, Cond. IB	50 - 2000 Hz, 7.3 Grms
Humidity	MIL-STD-202, Method 103B, Cond. B	100% RH at 35c, 95%RH at 40°C
Altitude	MIL-STD-883K, Method 1001, Cond. C	50,000 feet

Caution:

- Exceeding absolute maximum ratings shown will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- Heat Sink required during operation.

Please note, all information contained in this data sheet is subject to change without notice.

ver 1.0 0718