



Mountain Microwave

## Focus on the future 3 dB 180 Degree Hybrid Coupler

MM-BHC-005010-180

0.5-1.0 GHz,SMA

### General Description:

MM-BHC-005010-180 is a 180 Degree Hybrid Coupler that operates over the frequency range of 0.5 to 1.0 GHz. It has a minimum isolation of 22 dB and a maximum insertion loss of 0.6 dB. This product is outfitted with SMA female connectors.

### Features:

- Ultra Wide Band: 0.5-1.0 GHz
- High Isolation, Low VSWR
- Flat Coupling Level

### Applications:

- Test Labs
- Communication Systems
- Receivers Systems

### Electrical Specifications :

Parameter	Value			Units
	Min	Typ	Max	
Frequency Range	0.5		1.0	GHz
Coupling		3		dB
Insertion Loss		0.4	0.6	dB
VSWR		1.2	1.3	:1
Isolation		25	22	dB
Amplitude Balance			±0.6	dB
Phase Balance			±10	°
Power Handling			50	W
Impedance		50		Ω

### Mechanical Specifications:

Parameter	Value
Length	133.0 mm
Width	60.0 mm
Height	13.0 mm
Material / Finishing	Aluminum/Black Paint
RF Connector	SMA Female



Focus on the future


### 3 dB 180 Degree Hybrid Coupler

MM-BHC-005010-180

0.5-1.0 GHz,SMA

Mountain Microwave

#### Outline Drawing:

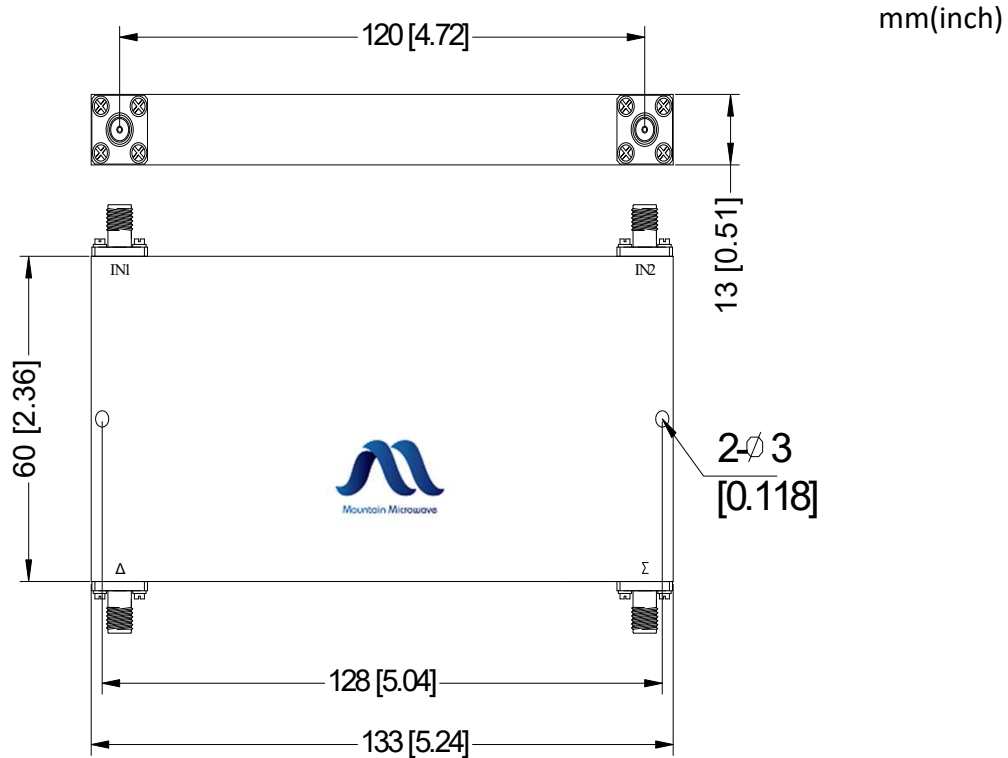

#### Environmental Conditions:

Parameter	Standard	Description
Operational Temperature		-45°C~+85°C
Storage Temperature		-55°C~+125°C
Random Vibration	MIL-STD-883K, Method 2026, Cond. IB	50 - 2000 Hz, 7.3 Grms
Humidity	MIL-STD-202, Method 103B, Cond. B	100% RH at 35c, 95%RH at 40°C
Altitude	MIL-STD-883K, Method 1001, Cond. C	50,000 feet

Please note, all information contained in this data sheet is subject to change without notice.

ver 1.0 0316