



Focus on the future **Waveguide Low Noise Amplifier**
 MM-MLN-210260-19-70
 210 to 260 GHz

General Description:

MM-MLN-210260-19-70 is a Waveguide Low Noise Amplifier that operates over the frequency range of 210 to 260 GHz. This model provides a typical gain of 19 dB and a typical noise figure of 7.0 dB. It provides an OP1dB of 0 dB typical and operates on +5 VDC with a typical current draw of 43 mA.

Features:

- Ultra Wide Band: 210-260 GHz
- Gain: 19 dB
- Internally regulated
- Unconditionally stable

Applications:

- Radar Systems
- Communication Systems
- Receivers Systems

Electrical Specifications (23° C):

Parameter	Value			Units
	Min	Typ	Max	
Frequency Range	210		260	GHz
Gain		19		dB
Gain Flatness		-		dB
Noise Figure		7.0		dB
Output Power (P1dB)		-		dBm
Psat		-		dBm
Input VSWR		2.5		:1
Output VSWR		3.5		:1
DC Voltage		+5		V
DC Current		43		mA

Absolute Maximum Ratings:

Condition	Value
DC Voltage	+5V
Maximum Input Power(CW)	10 dBm
ESD sensitivity (HBm)	Class 0, passed 150V

Mechanical Specifications:

Parameter	Value
Length	35 mm
Width	30 mm
Height	22 mm
RF Connector	WR08/UG-387




Mountain Microwave

Focus on the future Waveguide Low Noise Amplifier

MM-MLN-210260-19-70

210 to 260 GHz

Outline Drawing:

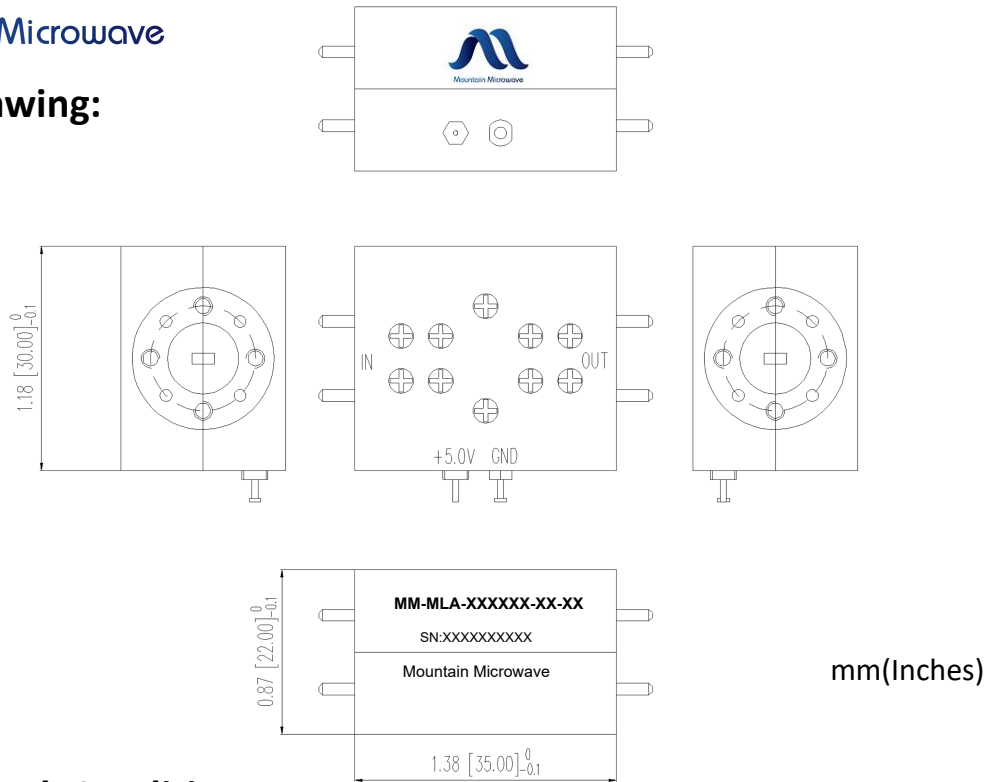

Environmental Conditions:

Parameter	Standard	Description
Operational Temperature		-55°C~+85°C
Storage Temperature		-45°C~+125°C
Random Vibration	MIL-STD-883K, Method 2026, Cond. IB	50 - 2000 Hz, 7.3 Grms
Humidity	MIL-STD-202, Method 103B, Cond. B	100% RH at 35c, 95%RH at 40°C
Altitude	MIL-STD-883K, Method 1001, Cond. C	50,000 feet

Caution:

- Exceeding absolute maximum ratings shown will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- Heat Sink required during operation.

Please note, all information contained in this data sheet is subject to change without notice.

ver 2.0 0318