



General Description:

MM-LNA-080120-28-1 is a Low Noise Amplifier that operates over the frequency range of 8.0 to 12.0 GHz. This model provides a typical gain of 28 dB and a typical noise figure of 1.2 dB. It provides an OP1dB of 12 dBm typical and operates on +5 VDC with a typical current draw of 70 mA.

Features:

- Ultra Wide Band: 8.0-12.0 GHz
- Gain: 28 dB
- 50 Ohm input and output match
- Internally regulated
- Unconditionally stable

Applications:

- Radar Systems
- Communication Systems
- Receivers Systems

Electrical Specifications (23° C):

Parameter	Value			Units
	Min	Typ	Max	
Frequency Range	8		12	GHz
Gain	25	28		dB
Gain Flatness		±1.0	±1.5	dB
Noise Figure		1.2	1.5	dB
Output Power (P1dB)	12	13		dBm
Output Psat		14		dBm
Input VSWR		1.5	2.0	:1
Output VSWR		1.8	2.0	:1
DC Voltage		+5		V
DC Current		70	80	mA

Absolute Maximum Ratings:

Condition	Value
DC Voltage	+6V
Maximum Input Power(CW)	-5 dBm
ESD sensitivity (HBm)	Class 0, passed 150V

Mechanical Specifications:

Parameter	Value
Length	17 mm
Width	17 mm
Height	8 mm
RF Connector	SMA Female



Focus on the future


Mountain Microwave

Low Noise Amplifier

MM-LNA-080120-28-1

8 to 12 GHz

Outline Drawing:

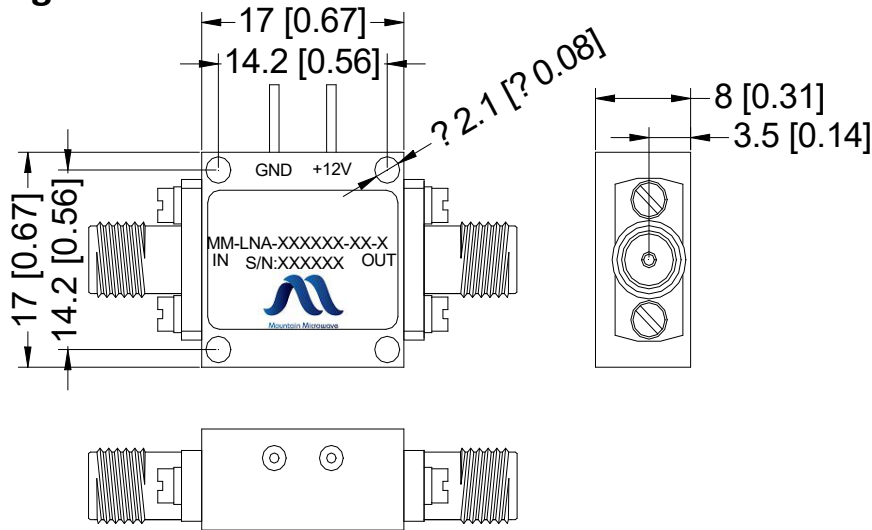

mm(Inches)

Environmental Conditions:

Parameter	Standard	Description
Operational Temperature		-45°C~+85°C
Storage Temperature		-55°C~+125°C
Random Vibration	MIL-STD-883K, Method 2026, Cond. IB	50 - 2000 Hz, 7.3 Grms
Humidity	MIL-STD-202, Method 103B, Cond. B	100% RH at 35c, 95%RH at 40°C
Altitude	MIL-STD-883K, Method 1001, Cond. C	50,000 feet

Caution:

- Exceeding absolute maximum ratings shown will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- Heat Sink required during operation.

Please note, all information contained in this data sheet is subject to change without notice.

ver 1.0 0618