



General Description:

MM-MPA-080086-15-23 is a Waveguide Power Amplifier that operates over the frequency range of 80 to 86 GHz. This model provides a typical gain of 15 dB . It provides a Psat of 23 dB typical and operates on +5 VDC with a typical current draw of 1500 mA.

Features:

- Ultra Wide Band: 80-86 GHz
- Gain: 15 dB
- Psat: 23 dB
- Internally regulated
- Unconditionally stable

Applications:

- Radar Systems
- Communication Systems
- Receivers Systems

Electrical Specifications (23° C):

Parameter	Value			Units
	Min	Typ	Max	
Frequency Range	80		86	GHz
Gain		15		dB
Gain Flatness		-		dB
Psat	19	23	26	dBm
Output Power (P1dB)		-		dBm
Input VSWR		2.0		:1
Output VSWR		2.0		:1
DC Voltage	-5	+5		V
DC Current	80	1500		mA

Absolute Maximum Ratings:

Condition	Value
DC Voltage	+5 V
Maximum Input Power(CW)	TBD
ESD sensitivity (HBm)	Class 0, passed 150V

Mechanical Specifications:

Parameter	Value
Length	54 mm
Width	64 mm
Height	48 mm
RF Connector	WR12/UG-387



Mountain Microwave


Focus on the future

Waveguide Power Amplifier

MM-MPA-080086-15-23

80 to 86 GHz

Outline Drawing:

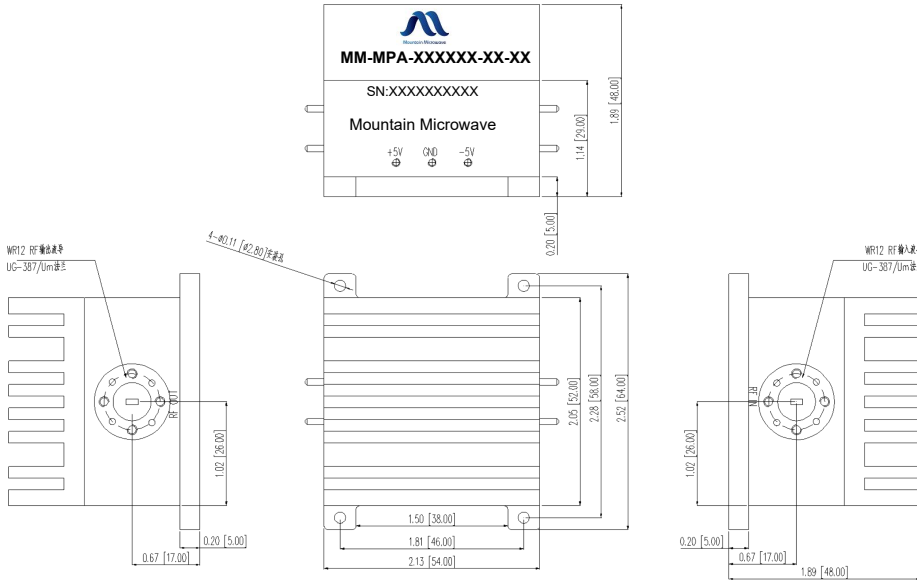

mm(Inches)

Environmental Conditions:

Parameter	Standard	Description
Operational Temperature		-10°C~+65°C
Storage Temperature		-45°C~+125°C
Random Vibration	MIL-STD-883K, Method 2026, Cond. IB	50 - 2000 Hz, 7.3 Grms
Humidity	MIL-STD-202, Method 103B, Cond. B	100% RH at 35c, 95%RH at 40°C
Altitude	MIL-STD-883K, Method 1001, Cond. C	50,000 feet

Caution:

- Exceeding absolute maximum ratings shown will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- Heat Sink required during operation.

Please note, all information contained in this data sheet is subject to change without notice.

ver 2.0 0318