



General Description:

MM-BDC-180400-20 is a 18.0 GHz to 40.0 GHz directional coupler having a 20 dB coupling factor and 12 dB directivity. This model handles an input power of 20 watts.

Features:

- Ultra Wide Band: 18.0-40.0 GHz
- Low Insertion Loss
- Flat Coupling Level

Applications:

- Radar Systems
- Communication Systems
- Receivers Systems

Electrical Specifications :

Parameter	Value			Units
	Min	Typ	Max	
Frequency Range	18.0		40.0	GHz
Coupling		20 ± 1.0		dB
Insertion Loss			1.5	dB
VSWR			1.5	:1
Directivity	12			dB
Power Handling			20	W
Impedance		50		Ω

Mechanical Specifications:

Parameter	Value
Length	26 mm
Width	15 mm
Height	11 mm
Material / Finishing	Aluminum/Black Paint
RF Connector	2.92mm Female




Mountain Microwave

Focus on the future Directional Coupler

MM-BDC-180400-20

18.0-40.0 GHz, 20 dB, 2.92mm Female

Outline Drawing:

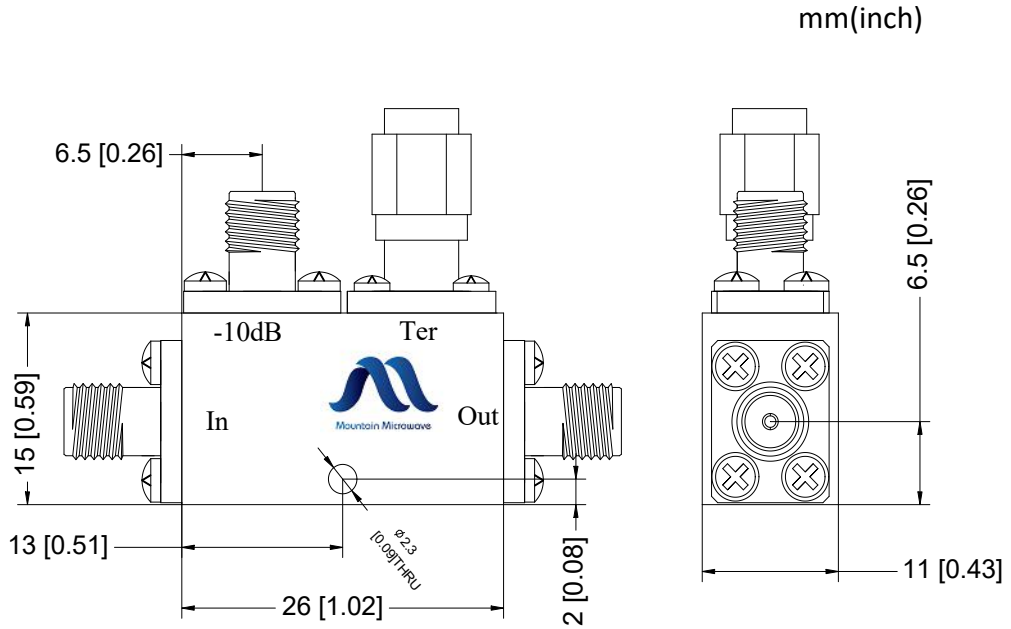

Environmental Conditions:

Parameter	Standard	Description
Operational Temperature		-45°C~+85°C
Storage Temperature		-55°C~+125°C
Random Vibration	MIL-STD-883K, Method 2026, Cond. IB	50 - 2000 Hz, 7.3 Grms
Humidity	MIL-STD-202, Method 103B, Cond. B	100% RH at 35c, 95%RH at 40°C
Altitude	MIL-STD-883K, Method 1001, Cond. C	50,000 feet

Please note, all information contained in this data sheet is subject to change without notice.

ver 1.0 0316