



Mountain Microwave

Focus on the future 3 dB 180 Degree Hybrid Coupler

MM-BHC-265400-180

26.5-40.0 GHz, 2.92mm

General Description:

MM-BHC-265400-180 is a 180 Degree Hybrid Coupler that operates over the frequency range of 26.5 to 40.0 GHz. It has a minimum isolation of 15 dB and a maximum insertion loss of 2.5 dB. This product is outfitted with 2.92mm female connectors.

Features:

- Ultra Wide Band: 26.5-40.0 GHz
- High Isolation, Low VSWR
- Flat Coupling Level

Applications:

- Test Labs
- Communication Systems
- Receivers Systems

Electrical Specifications :

Parameter	Value			Units
	Min	Typ	Max	
Frequency Range	26.5		40.0	GHz
Coupling		3		dB
Insertion Loss		2.5	3.0	dB
VSWR		1.6	1.8	:1
Isolation		15	12	dB
Amplitude Balance			± 1.0	dB
Phase Balance			± 12	°
Power Handling			50	W
Impedance		50		Ω

Mechanical Specifications:

Parameter	Value
Length	29.6 mm
Width	24.0 mm
Height	11.0 mm
Material / Finishing	Aluminum/Black Paint
RF Connector	2.92mm Female




Mountain Microwave

Focus on the future 3 dB 180 Degree Hybrid Coupler

MM-BHC-265400-180

26.5-40.0 GHz, 2.92mm

Outline Drawing:

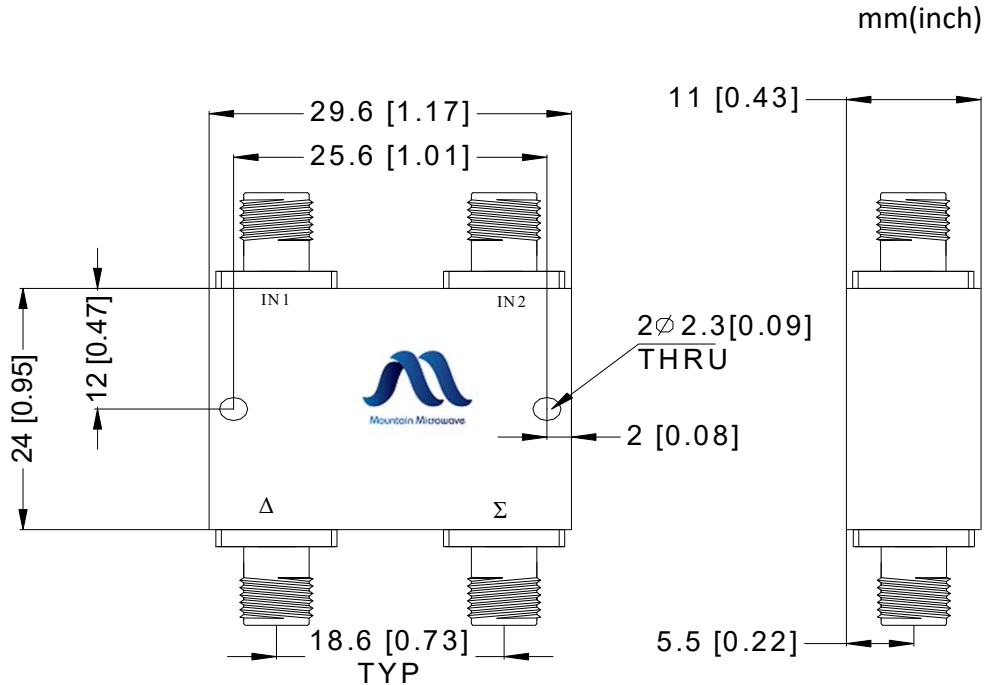

Environmental Conditions:

Parameter	Standard	Description
Operational Temperature		-45°C~+85°C
Storage Temperature		-55°C~+125°C
Random Vibration	MIL-STD-883K, Method 2026, Cond. IB	50 - 2000 Hz, 7.3 Grms
Humidity	MIL-STD-202, Method 103B, Cond. B	100% RH at 35c, 95%RH at 40°C
Altitude	MIL-STD-883K, Method 1001, Cond. C	50,000 feet

Please note, all information contained in this data sheet is subject to change without notice.

ver 1.0 1217