



General Description:

MM-LNA-008210-26-3 is a Low Noise Amplifier that operates over the frequency range of 0.8 to 21 GHz. This model provides a typical gain of 26 dB and a typical noise figure of 3.0 dB. It provides an OP1dB of 24 dB typical and operates on +12 VDC with a typical current draw of 500 mA.

Features:

- Ultra Wide Band: 0.8-21.0 GHz
- Gain: 26 dB
- 50 Ohm input and output match
- Internally regulated
- Unconditionally stable

Applications:

- Radar Systems
- Communication Systems
- Receivers Systems

Electrical Specifications (23° C):

Parameter	Value			Units
	Min	Typ	Max	
Frequency Range	0.8		21	GHz
Gain	23	26		dB
Gain Flatness		±2.0	±2.5	dB
Noise Figure		3.0	5.5	dB
Output Power (P1dB)	24	26		dBm
Output IP3		36		dBm
Input VSWR		1.8	2.5	:1
Output VSWR		1.8	2.5	:1
DC Voltage		+12		V
DC Current		500		mA

Absolute Maximum Ratings:

Condition	Value
DC Voltage	+15V
Maximum Input Power(CW)	+10 dBm
ESD sensitivity (HBm)	Class 0, passed 150V

Mechanical Specifications:

Parameter	Value
Length	35 mm
Width	40 mm
Height	12 mm
RF Connector	2.92mm Female



Mountain Microwave


Focus on the future

Low Noise Amplifier

MM-LNA-008210-26-3

0.8 to 21 GHz

Outline Drawing:

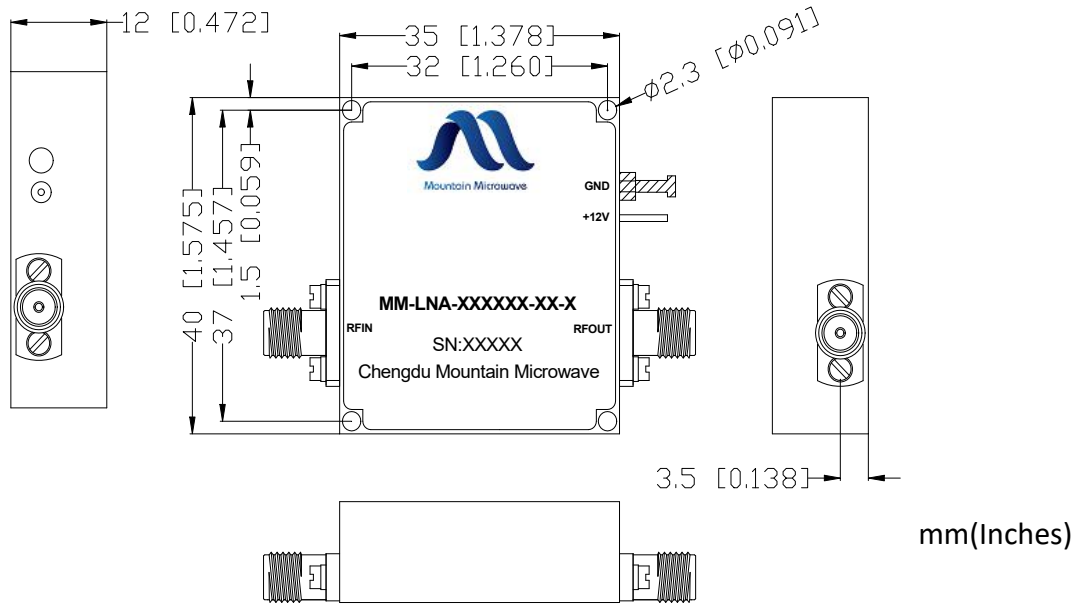

Environmental Conditions:

Parameter	Standard	Description
Operational Temperature		-45°C~+85°C
Storage Temperature		-55°C~+125°C
Random Vibration	MIL-STD-883K, Method 2026, Cond. IB	50 - 2000 Hz, 7.3 Grms
Humidity	MIL-STD-202, Method 103B, Cond. B	100% RH at 35c, 95%RH at 40°C
Altitude	MIL-STD-883K, Method 1001, Cond. C	50,000 feet

Caution:

- Exceeding absolute maximum ratings shown will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- Heat Sink required during operation.

Please note, all information contained in this data sheet is subject to change without notice.

ver 2.0 0318