



General Description:

MM-BPD-030120-16 is a 16-Way Power Divider operating over the 3.0 to 12.0 GHz frequency range. This model has a maximum insertion loss of 4.5 dB and has very good phase and amplitude match. The compact housing is outfitted with SMA female connectors.

Features:

- Ultra Wide Band: 3.0-12.0 GHz
- Ultra Broadband, Multi-Octave
- Superior Phase & Amplitude Balance

Applications:

- Radar Systems
- Communication Systems
- Receivers Systems

Electrical Specifications :

Parameter	Value			Units
	Min	Typ	Max	
Frequency Range	3.0		12.0	GHz
Insertion Loss			4.5	dB
VSWR			1.8	:1
Isolation	15			dB
Amplitude Balance			± 1.5	dB
Phase Balance			± 20	°
Power Handling			30	W
Impedance		50		Ω

Mechanical Specifications:

Parameter	Value
Length	212 mm
Width	102 mm
Height	10 mm
Material / Finishing	Aluminum/Black Paint
RF Connector	SMA Female



Focus on the future


Broadband Power Divider

MM-BPD-030120-16

3.0-12.0 GHz, 16-Way

Mountain Microwave

Outline Drawing:

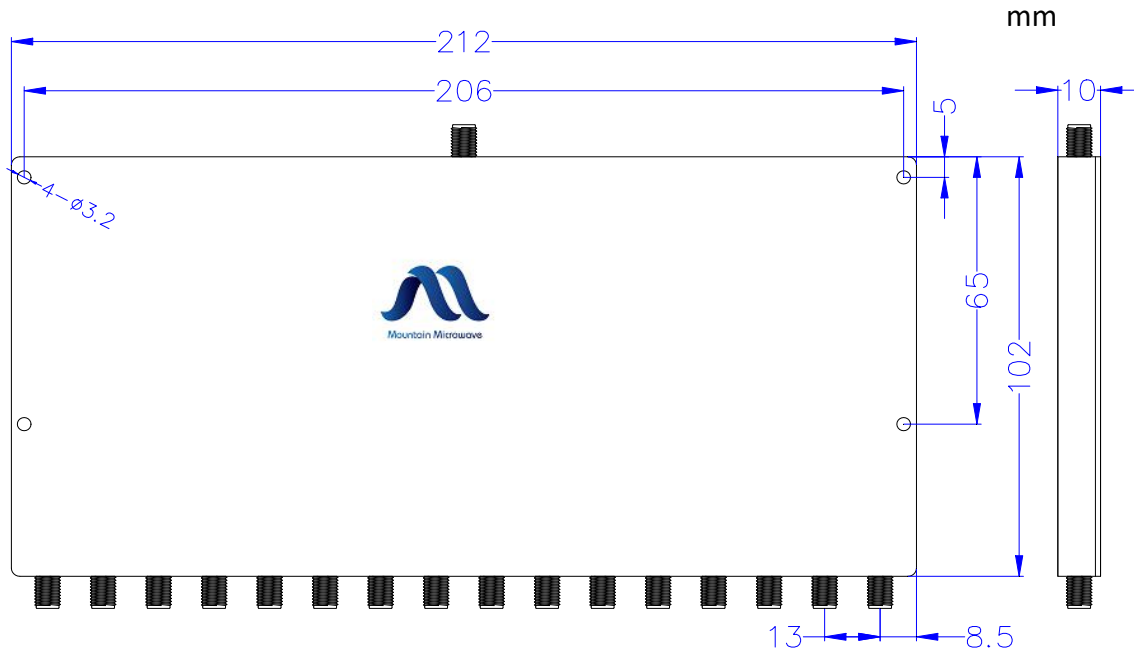

Environmental Conditions:

Parameter	Standard	Description
Operational Temperature		-45 ~+85
Storage Temperature		-55 ~+125
Random Vibration	MIL-STD-883K, Method 2026, Cond. IB	50 - 2000 Hz, 7.3 Grms
Humidity	MIL-STD-202, Method 103B, Cond. B	100% RH at 35c, 95%RH at 40
Altitude	MIL-STD-883K, Method 1001, Cond. C	50,000 feet

Please note, all information contained in this data sheet is subject to change without notice.

ver 1.0 0316